



STAINLESS STEEL BRAIDED GALVANIZED STEEL CONDUITS - TYPE SLB

S.L.B. Conduit is very useful for situations where a robust metal conduit along with high flexibility is demanded. This conduit has a square-locked construction in combination with a stainless steel braid. In combination with the special fittings this conduit is easy and quick to install. Type S.L.B. is particularly used in (mechanical) critical situations, such as machine building, steel works and also in transport systems and security. The S.L.B. is excellent in protecting cables against metal particles, vandalism, rodents and offers high level of shielding.

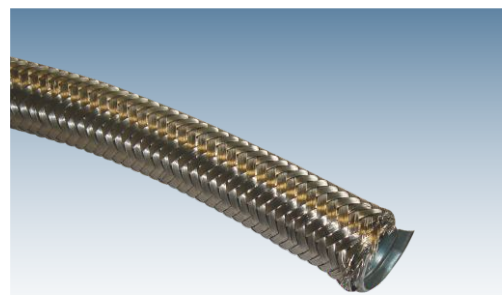

RoHS

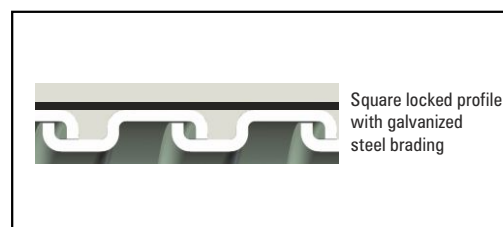

Technical Details :	
Construction	Galvanized Steel, Square-Locked Core with Stainless Steel Braid (AISI 304)
Temperature Range	-55° to +300°C
Protection Class	IP 40
Colour	Metal
Compression Resistance	Heavy (1250 N)
Impact Resistance	Heavy (6 J)
Tensile Strength	Heavy (1000 N)
Resistance to Flame propagation	Non Flame Propagating

Size (Inch)	Cat. No	Inner Diameter (mm)	Outer Diameter (mm)	Bending Radius R (mm)	Standard Pack (meters)
3/8"	ASLB-3/8"	12.6	15.8	60	30
1/2"	ASLB-1/2"	16.0	20.5	75	30
3/4"	ASLB-3/4"	21.0	25.5	90	30
1"	ASLB-1"	26.5	32.8	120	30
1 1/4"	ASLB-1 1/4"	35.1	40.5	135	30
1 1/2"	ASLB-1 1/2"	40.3	46.5	165	30
2"	ASLB-2"	51.6	58	210	30