

No. of Phases		3	Reference Standard		IS:12615	
Frame Designation		80	Protection IS:4691		IP 55	
Rated Output	kW	0.37	Vibration Standard		IS:12075	
	HP	0.50	Noise Standard		IS:12065	
No. of Poles		6	Duty		S1	
Rated Voltage		V	415	Insulation Class		F
Rated Frequency		Hz	50	Cooling IS:6362		IC411
Rated Current		A	1.1	Terminal Box Details	Type	HM2GN
Rated Speed		rpm	925		Terminal Size	M4
Rated Torque		kgm	0.39		No. of Terminal	6
Efficiency	Full load	%	71.9	Bearing Data	Max. cable size (Cu)	mm <sup>2</sup> 1x3Cx4.0
	3/4 load	%	71.9		DE	6204ZZ
	1/2 load	%	68.0		NDE	6204ZZ
Power factor	Full load		0.68	Lubrication	Prelubricated	
	3/4 load		0.63	Life L10 (Direct Coupled)	hrs. 50,000	
	1/2 load		0.50	Regreasing Time	hrs. -	
Max. Temp. Rise (Res.)		°C	70	Lifting Eyebolt		-
Acceleration Time		sec.	-	Motor Weight (approx)		kg 15.0
Stator Connection			Y	Rotor GD <sup>2</sup>		kgm <sup>2</sup> 0.0049
Tropicalised? (Yes / No)			Yes	Ambient Temp.		°C 50
I <sub>st</sub> / I <sub>r</sub>			5.0	Overall Dimensions of Packed motor (LxBxH) (mm)		
T <sub>st</sub> / T <sub>r</sub>			1.8			
T <sub>po</sub> / T <sub>r</sub>			2.3	Voltage Variation ±		% 10
Locked rotor withstand time	Hot	sec.	7	Frequency Variation ±		% 5
	Cold	sec.	16	Combiend Variation ±		% 10

Remarks: (1) Efficiency Class : IE3  
(2) Motor Construction : TEFC


Data subject to tolerance as per IEC 60034-1

Prep.: Engg

Chkd.:

Date:

Date:

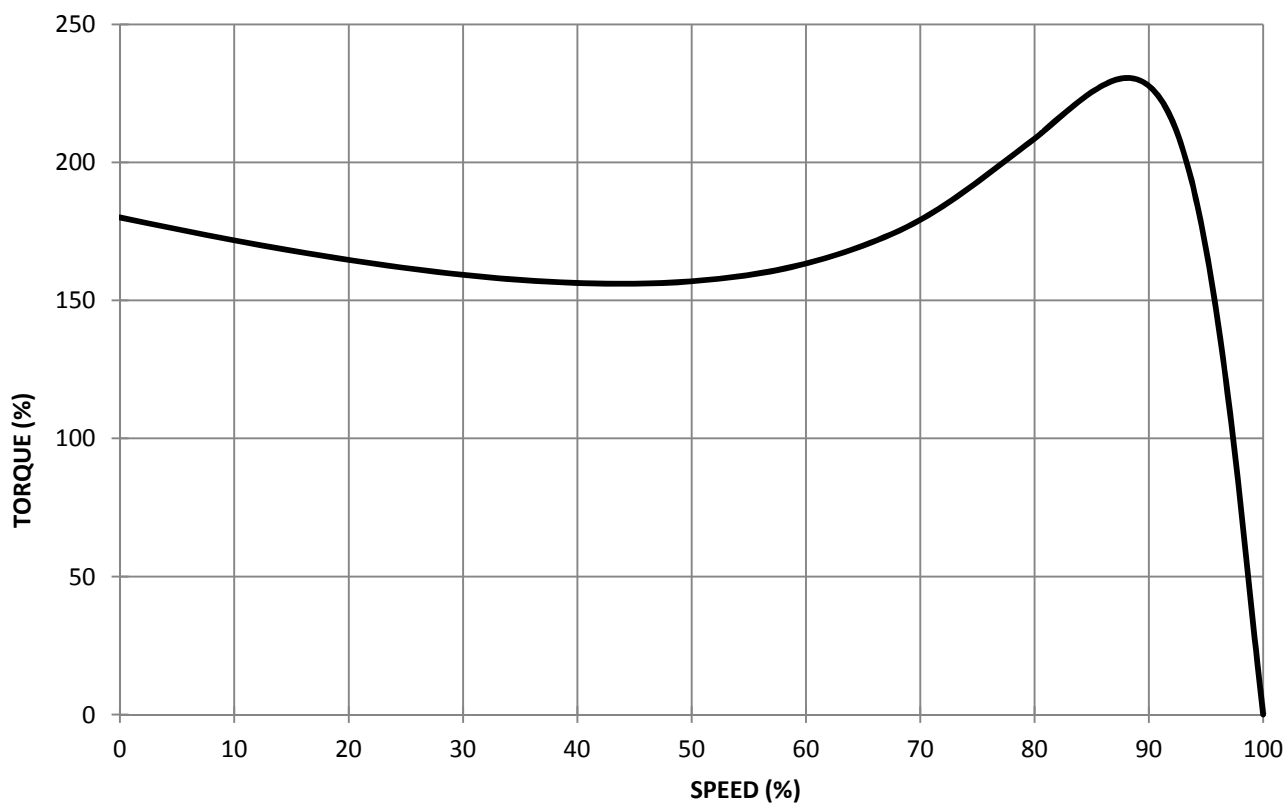

LOAD-EFFICIENCY-POWER FACTOR CURVE

