

No. of Phases		3	Reference	Performance	IS:12615	
Frame Designation		71 FLP	Standard	Enclosure	IS:60079-1	
Rated Output	kW	0.37	Protection IS:4691		IP 55	
	HP	0.50	Vibration Standard		IS:12075	
No. of Poles		4	Noise Standard		IS:12065	
Rated Voltage		V	Duty		S1	
Rated Frequency		Hz	Insulation Class		F	
Rated Current		A	Cooling IS:6362		IC411	
Rated Speed		rpm	Terminal Box Details	Terminal Size		M4
Rated Torque		kgm		No. of Terminal		6
Efficiency	Full load	%		Max. cable size		mm ² 1x3Cx4.0
	3/4 load	%	DE		6202ZZ	
	1/2 load	%	NDE		6202ZZ	
Power factor	Full load		Bearing Data	Lubrication		Prelubricated
	3/4 load			Life L10 (Direct coupled)		hrs. 50,000
	1/2 load			Regreasing Time		hrs. -
Temp. Rise (Res.)		°C	70		Lifting Eyebolt IS:4190	-
Acceleration Time		sec.	-		Motor Weight (approx)	kg 20
Stator Connection			Y		Rotor GD ²	kgm ² 0.0022
Tropicalised? (Yes/No)			Yes		Ambient Temp.	°C 50
I _{st} / I _r		%	6.0		Overall Dimensions of Packed motor (LxBxH) (mm)	
T _{st} / T _r		%	1.9			
T _{po} / T _r		%	2.3			
Locked rotor withstand time	Hot	sec	6		Voltage Variation ±	% 10
	Cold	sec	13		Frequency Variation ±	% 5
					Combiend Variation ±	% 10

Remarks: (1) Efficiency Class : IE2
(2) Motor construction: TEFC

Data subject to tolerance as per IS:12615.


Prep.: Engg

Chkd.:

Date:

Date:

TORQUE SPEED CURVE

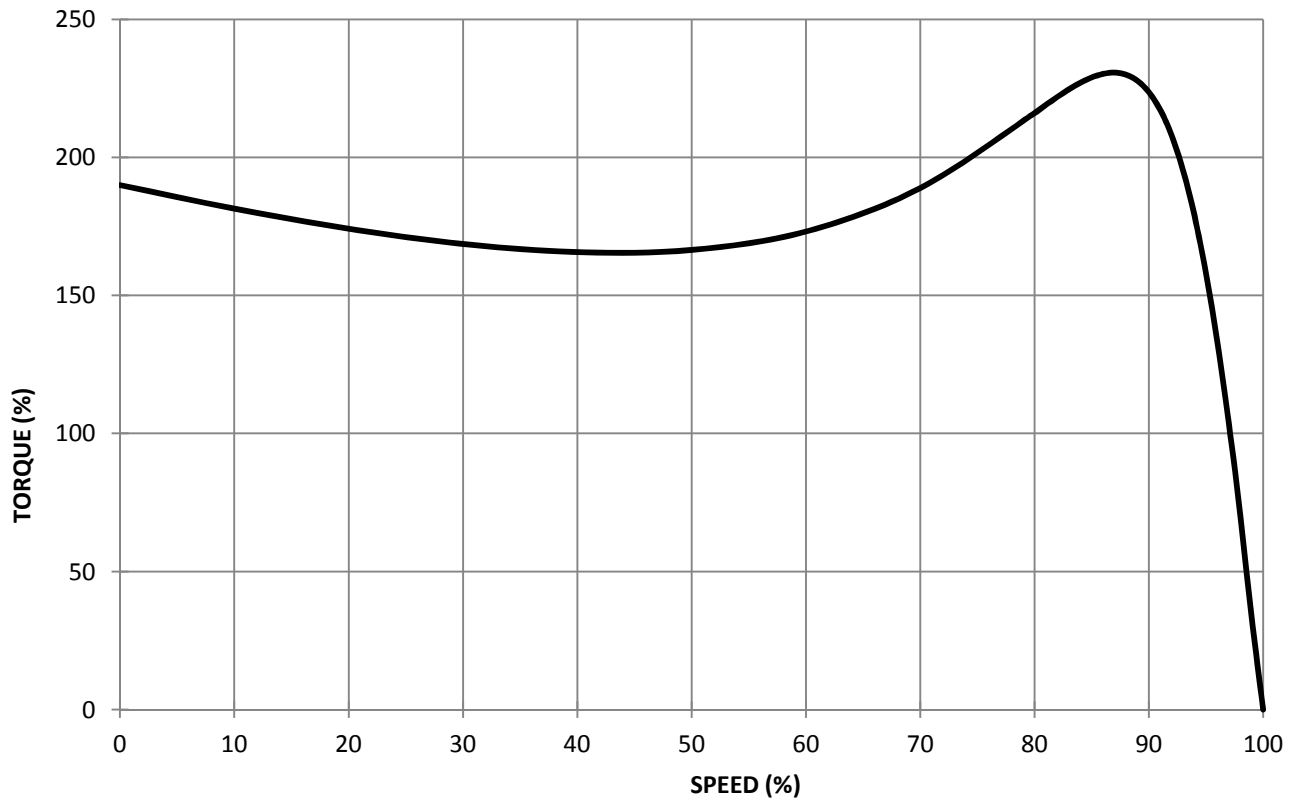

LOAD-EFFICIENCY-POWER FACTOR CURVE

