

No. of Phases		3	Reference Standard		IS:12615	
Frame Designation		90L	Protection IS:4691		IP 55	
Rated Output	kW	2.20	Vibration Standard		IS:12075	
	HP	3.00	Noise Standard		IS:12065	
No. of Poles		2	Duty		S1	
Rated Voltage		V	415	Insulation Class		F
Rated Frequency		Hz	50	Cooling IS:6362		IC411
Rated Current		A	4.5	Terminal Box Details	Type	HM2GN
Rated Speed		rpm	2890		Terminal Size	M4
Rated Torque		kgm	0.74		No. of Terminal	6
Efficiency	Full load	%	83.2	Bearing Data	Max. cable size (Cu) mm ²	1x3Cx4.0
	3/4 load	%	83.2		DE	6205ZZ
	1/2 load	%	80.0		NDE	6205ZZ
Power factor	Full load		0.82	Lubrication	Prelubricated	
	3/4 load		0.78	Life L10 (Direct Coupled) hrs.	50,000	
	1/2 load		0.74	Regreasing Time hrs.	-	
Max. Temp. Rise (Res.)		°C	70	Lifting Eyebolt		-
Acceleration Time		sec.	-	Motor Weight (approx)	kg	22.0
Stator Connection			D	Rotor GD ²	kgm ²	0.0093
Tropicalised? (Yes / No)			Yes	Ambient Temp.	°C	50
I _{st} / I _r			7.0	Overall Dimensions of Packed motor (LxBxH) (mm)		
T _{st} / T _r			2.4			
T _{po} / T _r			2.8	Voltage Variation ±	%	10
Locked rotor withstand time	Hot	sec.	3	Frequency Variation ±	%	5
	Cold	sec.	7	Combiend Variation ±	%	10

Remarks: (1) Efficiency Class : IE2
(2) Motor Construction : TEFC


Data subject to tolerance as per IEC 60034-1

Prep.: Engg

Chkd.:

Date:

Date:

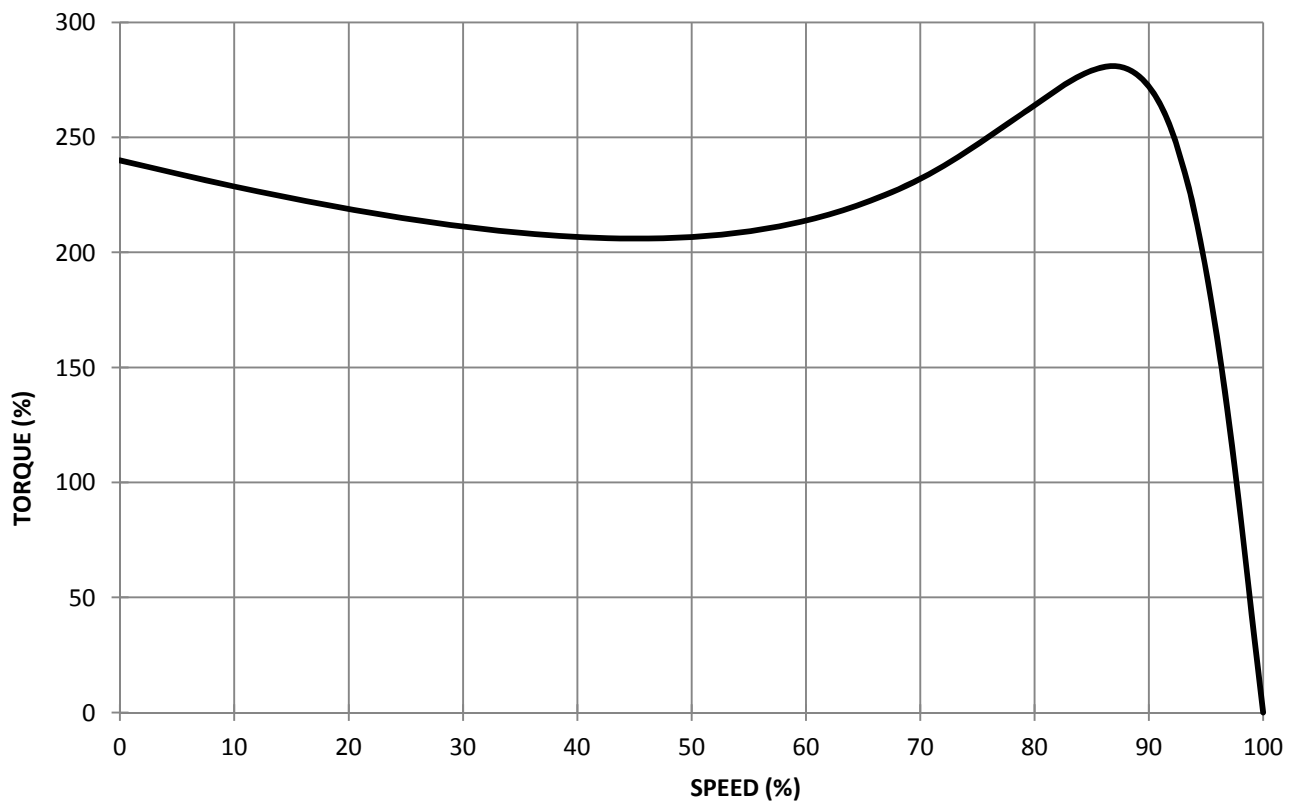

LOAD-EFFICIENCY-POWER FACTOR CURVE

