

No. of Phases		3	Reference Standard		IS:12615	
Frame Designation		112M	Protection IS:4691		IP 55	
Rated Output	kW	2.20	Vibration Standard		IS:12075	
	HP	3.00	Noise Standard		IS:12065	
No. of Poles		6	Duty		S1	
Rated Voltage		V	415	Insulation Class		F
Rated Frequency		Hz	50	Cooling IS:6362		IC411
Rated Current		A	4.8	Terminal Box Details	Type	HM3GN
Rated Speed		rpm	950		Terminal Size	M5
Rated Torque		kgm	2.26		No. of Terminal	6
Efficiency	Full load	%	81.8	Bearing Data	Max. cable size (Cu)	mm ² 2x3Cx10.0
	3/4 load	%	81.8		DE	6206ZZ
	1/2 load	%	78.5		NDE	6206ZZ
Power factor	Full load		0.78	Lubrication	Prelubricated	
	3/4 load		0.71	Life L10 (Direct Coupled)	hrs. 50,000	
	1/2 load		0.58	Regreasing Time	hrs. -	
Max. Temp. Rise (Res.)		°C	70	Lifting Eyebolt		M8
Acceleration Time		sec.	-	Motor Weight (approx)		kg 39.0
Stator Connection			D	Rotor GD ²		kgm ² 0.0467
Tropicalised? (Yes / No)			Yes	Ambient Temp.		°C 50
I _{st} / I _r			6.0	Overall Dimensions of Packed motor (LxBxH) (mm)		
T _{st} / T _r			2.1			
T _{po} / T _r			2.5	Voltage Variation ±		% 10
Locked rotor withstand time	Hot	sec.	6	Frequency Variation ±		% 5
	Cold	sec.	13	Combiend Variation ±		% 10

Remarks: (1) Efficiency Class : IE2
(2) Motor Construction : TEFC


Data subject to tolerance as per IEC 60034-1

Prep.: Engg

Chkd.:

Date:

Date:

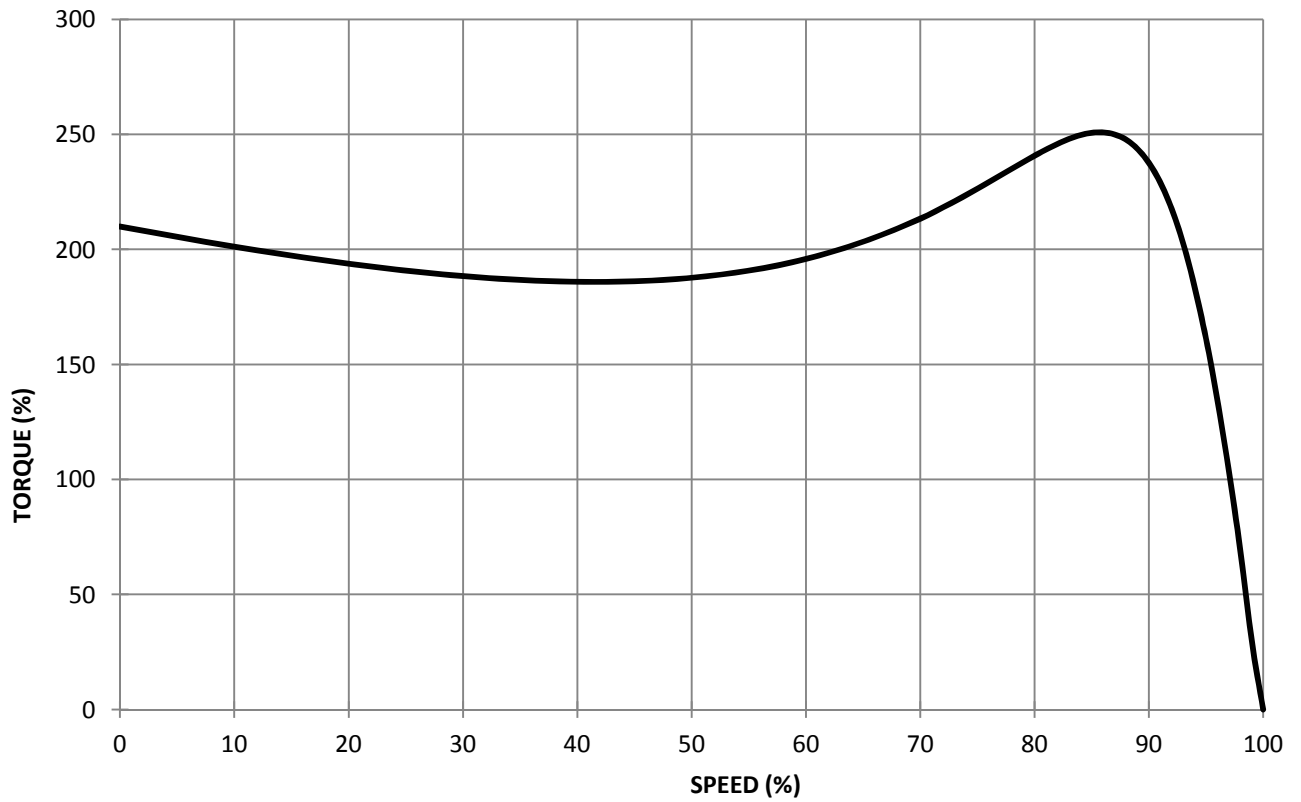

LOAD-EFFICIENCY-POWER FACTOR CURVE

EP2 123-06

