

No. of Phases		3	Reference	Performance	IS:12615	
Frame Designation		132M FLP	Standard	Enclosure	IS:60079-1	
Rated Output	kW	5.50	Protection IS:4691		IP 55	
	HP	7.50	Vibration Standard		IS:12075	
No. of Poles		6	Noise Standard		IS:12065	
Rated Voltage		V	Duty		S1	
Rated Frequency		Hz	Insulation Class		F	
Rated Current		A	Cooling IS:6362		IC411	
Rated Speed		rpm	Terminal Box Details	Terminal Size		M5
Rated Torque		kgm		No. of Terminal		6
Efficiency	Full load	%	Max. cable size		mm <sup>2</sup> 2x3Cx10.0	
	3/4 load	%	DE		6308ZZ	
	1/2 load	%	NDE		6208ZZ	
Power factor	Full load		Bearing Data	Lubrication		Prelubricated
	3/4 load			Life L10 (Direct coupled)		hrs. 50,000
	1/2 load			Regreasing Time		hrs. -
Temp. Rise (Res.)		°C	Lifting Eyebolt IS:4190		M10	
Acceleration Time		sec.	Motor Weight (approx)		kg 97	
Stator Connection		D	Rotor GD <sup>2</sup>		kgm <sup>2</sup> 0.1487	
Tropicalised? (Yes/No)		Yes	Ambient Temp.		°C 50	
I <sub>st</sub> / I <sub>r</sub>		%	Overall Dimensions of Packed motor (LxBxH) (mm)			
T <sub>st</sub> / T <sub>r</sub>		%				
T <sub>po</sub> / T <sub>r</sub>		%	Voltage Variation ±		% 10	
Locked rotor withstand time	Hot	sec	Frequency Variation ±		% 5	
	Cold	sec	Combiend Variation ±		% 10	

Remarks: (1) Efficiency Class : IE3  
(2) Motor construction: TEFC

Data subject to tolerance as per IS:12615.


Prep.: Engg

Chkd.:

Date:

Date:

### TORQUE SPEED CURVE

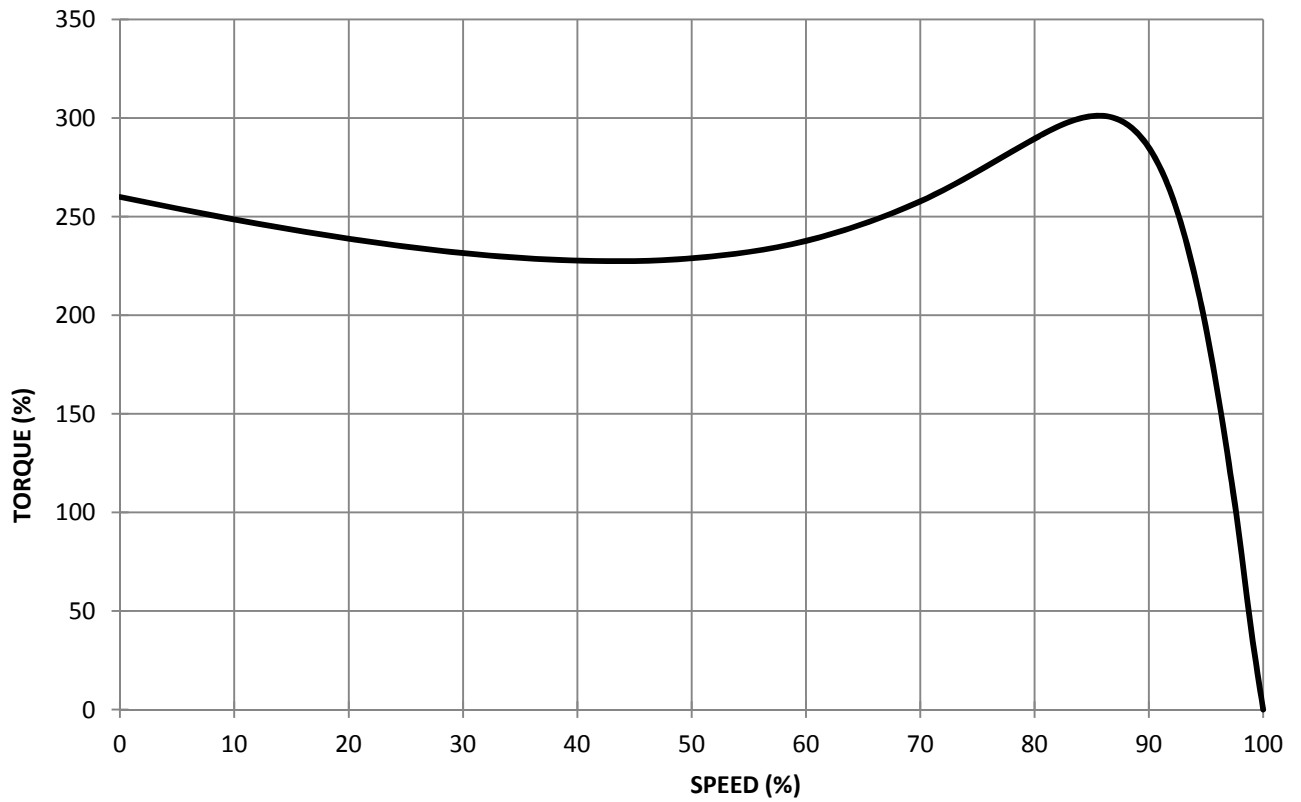

### LOAD-EFFICIENCY-POWER FACTOR CURVE

