

No. of Phases		3	Reference Standard		IS:12615	
Frame Designation		250MX	Protection IS:4691		IP 55	
Rated Output	kW	55.00	Vibration Standard		IS:12075	
	HP	75.00	Noise Standard		IS:12065	
No. of Poles		4	Duty		S1	
Rated Voltage		V	415	Insulation Class		F
Rated Frequency		Hz	50	Cooling IS:6362		IC411
Rated Current		A	94.0	Terminal Box Details	Type	HM5GN
Rated Speed		rpm	1480		Terminal Size	M8
Rated Torque		kgm	36.20		No. of Terminal	6
Efficiency	Full load	%	93.5	Bearing Data	Max. cable size (Cu)	mm <sup>2</sup> 2x3Cx70.0
	3/4 load	%	93.5		DE	6315
	1/2 load	%	93.0		NDE	6315
Power factor	Full load		0.87	Lubrication	Mobil / Unirex N3	
	3/4 load		0.84	Life L10 (Direct Coupled)	hrs.	50,000
	1/2 load		0.79	Regreasing Time	hrs.	6,000
Max. Temp. Rise (Res.)		°C	70	Lifting Eyebolt		M16
Acceleration Time		sec.	-	Motor Weight (approx)		kg 410.0
Stator Connection			D	Rotor GD <sup>2</sup>		kgm <sup>2</sup> 1.9856
Tropicalised? (Yes / No)			Yes	Ambient Temp.		°C 50
I <sub>st</sub> / I <sub>r</sub>			7.0	Overall Dimensions of Packed motor (LxBxH) (mm)		
T <sub>st</sub> / T <sub>r</sub>			2.3			
T <sub>po</sub> / T <sub>r</sub>			2.6	Voltage Variation ±		% 10
Locked rotor withstand time	Hot	sec.	7	Frequency Variation ±		% 5
	Cold	sec.	15	Combiend Variation ±		% 10

Remarks: (1) Efficiency Class : IE2  
(2) Motor Construction : TEFC


Data subject to tolerance as per IEC 60034-1

Prep.: Engg

Chkd.:

Date:

Date:

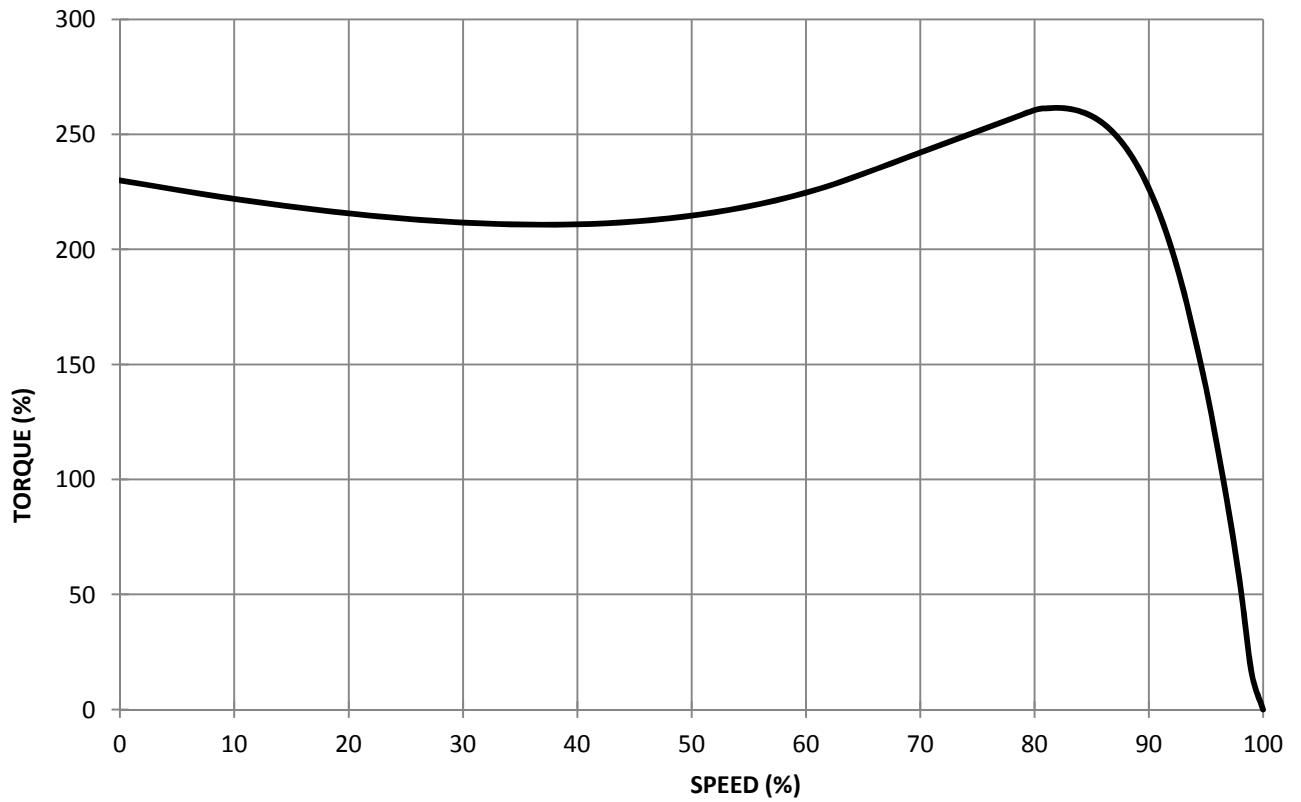

LOAD-EFFICIENCY-POWER FACTOR CURVE

