

## Ekinox<sup>3</sup> SPN DB's

for DX<sup>3</sup> MCB, Isolator, RCCB and RCBO



## Ekinox<sup>3</sup> ETPN DB's

for DX<sup>3</sup> MCB, Isolator, RCCB and RCBO



5076 05



5076 12



5076 61



5076 82

Dimensions p. 11

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar
- With Neutral bar, Earthbar and Cable ties for Cable management
- Fully shrouded Neutral bars
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's

Pack	Cat.Nos	IP 30 - *IK 08	Number of modules	MRP* ₹ / unit
1	5076 00	4 way	4	1126
1	5076 01	8 way	8	1410
1	5076 02	12 way	12	1672
1	5076 03	16 way	16	2060
1	5076 04	18 way	18	2400
1	5076 05	20 way	20	2464
<b>IP 43 - *IK 09 with metal door</b>				
1	5076 10	4 way	4	1512
1	5076 11	8 way	8	1874
1	5076 12	12 way	12	2254
1	5076 13	16 way	16	2830
1	5076 14	18 way	18	3100
1	5076 15	20 way	20	3498
<b>IP 43 - *IK 09 with acrylic door</b>				
1	5076 20	4 way	4	1930
1	5076 21	8 way	8	2232
1	5076 22	12 way	12	2714
1	5076 23	16 way	16	3374
1	5076 24	18 way	18	3700
1	5076 25	20 way	20	3954
<b>IP 54 - *IK 09</b>				
1	5076 40	4 way	4	5068
1	5076 41	8 way	8	5956
1	5076 42	12 way	12	6844
1	5076 43	16 way	16	7612
1	5076 44	18 way	18	8000
1	5076 45	20 way	20	8448

Dimensions p. 12-13

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar for each phase
- With Neutral bar, Earthbar and Cable ties for Cable management
- Fully insulated busbar & shrouded Neutral bars
- Improved Pan assembly for ease of installation
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCB's as outgoing
- Supplied with wireset
- Can be converted to PPI DB at site using conversion kit


Pack	Cat.Nos	IP 30 - *IK 08	Number of modules	MRP* ₹ / unit
1	5076 60	4 way	8+12	3110
1	5076 61	6 way	8+18	3836
1	5076 62	8 way	8+24	4510
1	5076 63	12 way	8+36	6684
1	5076 64	16 way	8+48	8240
1	5076 66	20 way	8+60	11494
<b>IP 43 - *IK 09 with metal door</b>				
1	5076 70	4 way	8+12	3698
1	5076 71	6 way	8+18	4560
1	5076 72	8 way	8+24	5466
1	5076 73	12 way	8+36	8190
1	5076 74	16 way	8+48	10154
1	5076 76	20 way	8+60	14216
<b>IP 43 - *IK 09 with acrylic door</b>				
1	5076 80	4 way	8+12	4806
1	5076 81	6 way	8+18	5934
1	5076 82	8 way	8+24	7118
1	5076 83	12 way	8+36	10916
1	5076 84	16 way	8+48	13100
1	5076 86	20 way	8+60	18340
<b>IP 54 - *IK 09</b>				
1	5076 90	4 way	8+12	12074
1	5076 91	6 way	8+18	14530
1	5076 92	8 way	8+24	15892
1	5076 93	12 way	8+36	22398
1	5076 94	16 way	8+48	26878
1	5076 96	20 way	8+60	33630

# Ekinox<sup>3</sup> DB's

## ETPN DB's


### Dimensions

#### IP30

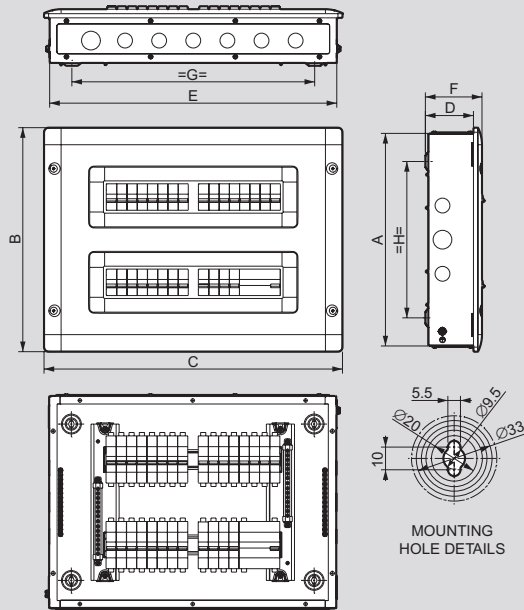


Sr. No.	ETPN Type	E	A	D	C	B	F	G	H
1	ETPN 4W IP30	400	374	82.5	420	394	97.5	322	275
2	ETPN 6W IP30	435	374	82.5	455	394	97.5	357	275
3	ETPN 8W IP30	505	374	82.5	525	394	97.5	427	275
4	ETPN 12W IP30	650	374	82.5	670	394	97.5	572	275
5	ETPN 16W IP30	886	374.4	82.5	906	394	97.5	766	275
6	ETPN 20W IP30	1030	374.4	82.5	1050	394	97.5	910	275

#### IP43/54

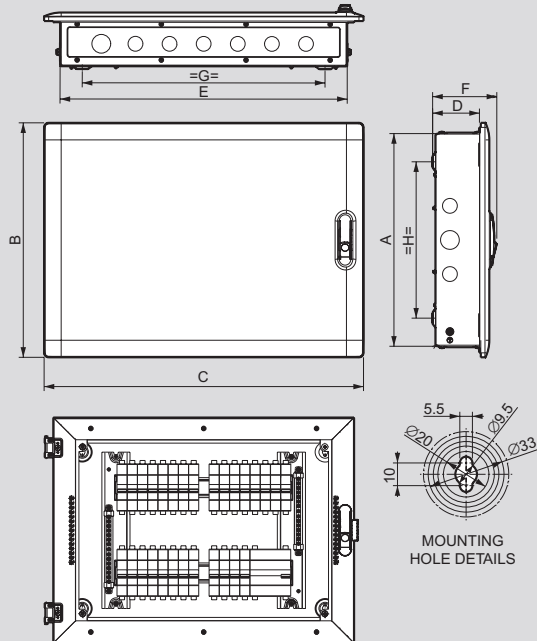

Sr. No.	ETPN Type	E	A	D	C	B	F	G	H
1	ETPN 4W IP43/54	400	374	82	456.8	412.4	112	322	275
2	ETPN 6W IP43/54	435	374	82	491.8	412.4	112	357	275
3	ETPN 8W IP43/54	505	374	82	561.8	412.4	112	427	275
4	ETPN 12W IP43/54	650	374	82	706.8	412.4	112	572	275

#### IP43 ACRY

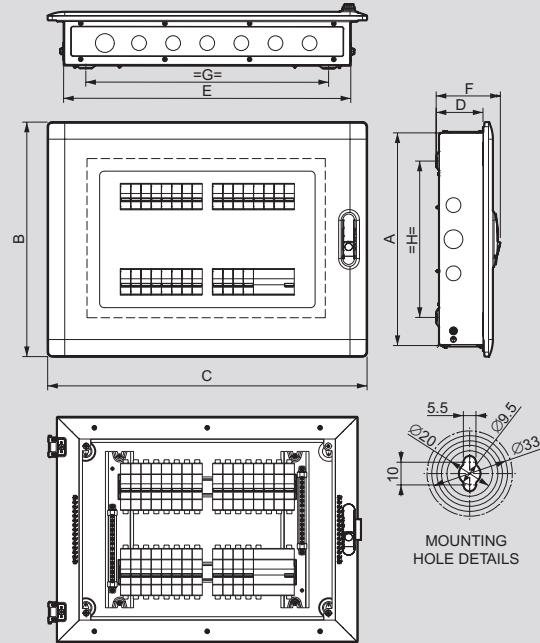

Sr. No.	ETPN Type	E	A	D	C	B	F	G	H
1	ETPN 4W IP43 ACRY	400	374	82	456.8	412.4	112	322	275
2	ETPN 6W IP43 ACRY	435	374	82	491.8	412.4	112	357	275
3	ETPN 8W IP43 ACRY	505	374	82	561.8	412.4	112	427	275
4	ETPN 12W IP43 ACRY	650	374	82	706.8	412.4	112	572	275