

Arteor™

10 Giga, Cat. 6 and Cat. 5e data sockets



Arteor™

rear pluggable data sockets and wiring splitter



Cover plates selection chart (p. 262-265)

Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568
 Contacts marked with 568 A and B dual colour code and numbers
 Connectors with self-stripping terminals
 Possibility of re-wiring in the event of error
 Multidirectionnal cable entry

Cover plates selection chart (p. 262-265)
 Technical data (p. 257)

Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568
 Contacts marked with 568 A and B dual colour code and numbers
 Connectors with self-stripping terminals
 Possibility of re-wiring in the event of error
 Multidirectionnal cable entry

Pack	Cat.Nos		RJ 45 - tool-less system
	White	Magnesium	
10/100	5734 32	5728 06	Rapid connection sockets, no tool required 10 Giga Supports 10 G base-T applications up to 100 m in a channel conforming to ISO/IEC TIA TSB 155 and IEEE 802.3an STP/FTP - 9 contacts, shielded folded metal 1 module 22.5 x 45 mm
10/100	5734 77	5736 77	Cat. 6 STP - 9 contacts, shielded folded metal 2 modules 45 x 45 mm
20/200	5734 34	5736 34	STP - 9 contacts 1 module 22.5 x 45 mm
10/100	5734 76	5736 76	FTP - 9 contacts 2 modules 45 x 45 mm
20/200	5734 28	5736 28	UTP - 8 contacts 1 module 22.5 x 45 mm
10/100	5734 74	5736 74	UTP - 8 contacts 2 modules 45 x 45 mm
20/200	5734 30	5736 30	Cat. 5e FTP - 9 contacts 1 module 22.5 x 45 mm
20/200	5734 29	5736 29	UTP - 8 contacts 1 module 22.5 x 45 mm
10/100	5734 75	5736 75	UTP - 8 contacts 2 modules 45 x 45 mm

Pack	Cat.Nos		Rear pluggable RJ 45 sockets
	White	Magnesium	
10/100	5723 31	5728 31	Used to create Cat. 6 and Cat. 5e links in accordance with standards 2 modules 45 x 45 mm Cat. 6 UTP FTP
10/100	5723 33	5728 33	
10/100	5723 30	5728 30	Cat. 5e UTP FTP
10/100	5723 32	5728 32	

Pack	Cat.Nos		Telephone/Ethernet wiring splitter
	White	Magnesium	
10/100	5723 36	5728 36	Provide increased security against theft and damage to double connectors Provide a rate of 10/100 Mbps Multidirectionnal cable entry Can be installed in all supports min. depth 35 mm Telephone and Ethernet applications marked on the protective cap 1 module 22.5 x 45 mm FTP double connector 9 contacts
10/100	5723 35	5728 35	

Arteor™

television and telephone sockets


Arteor™

RJ 45

■ Technical data





Television sockets

Cat. no. 5734 25 / 5736 25

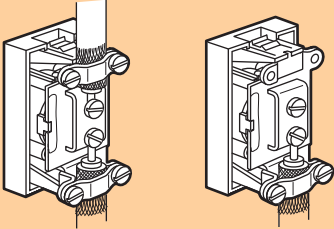

RJ 11




Cat. no. 5734 26 / 5736 26

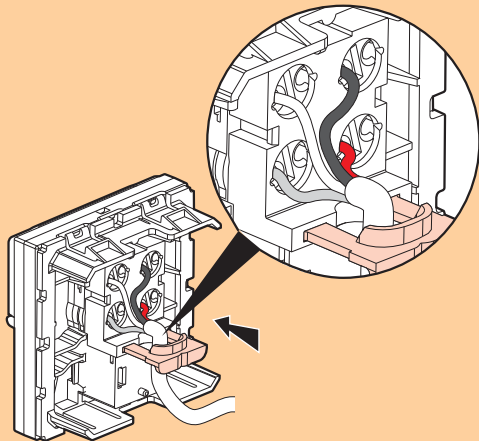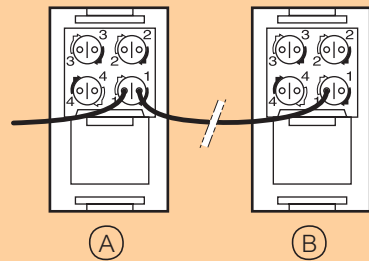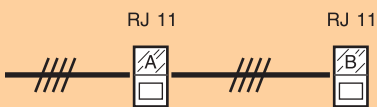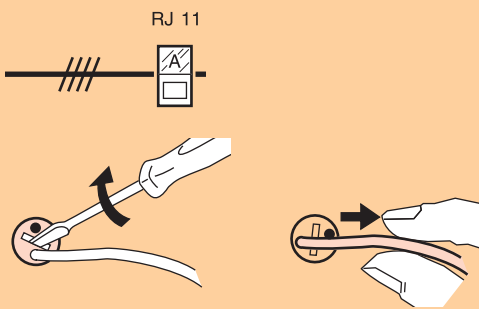


■ Technical data

RJ 45


Cat. no. 5734 29 / 28 / 5736 29 / 28

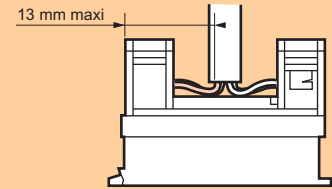





U/UTP



F/UTP



SF/UTP

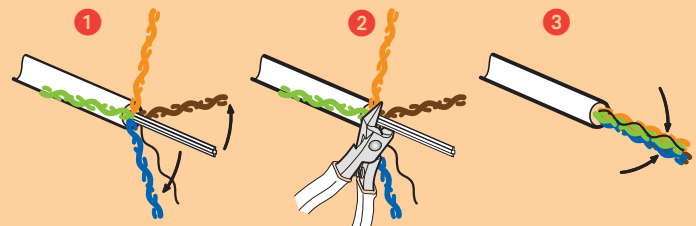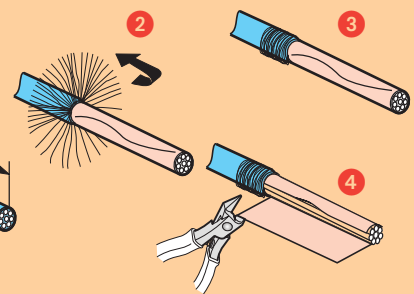

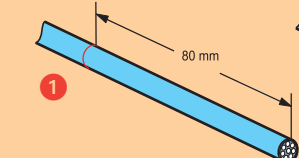


Arteor™
RJ 45 (continued)






■ **Technical data**

RJ 45

Cat. no. 5734 29 / 28 / 5736 29 / 28

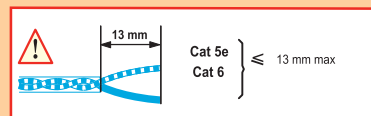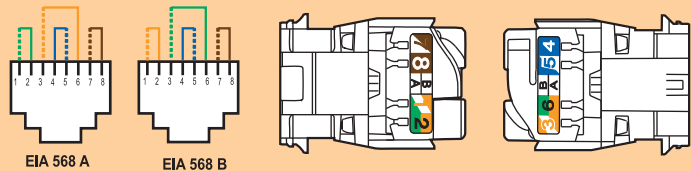

Wiring Diagram

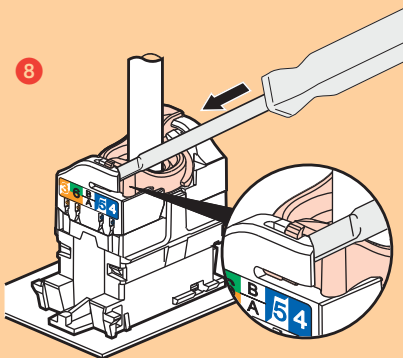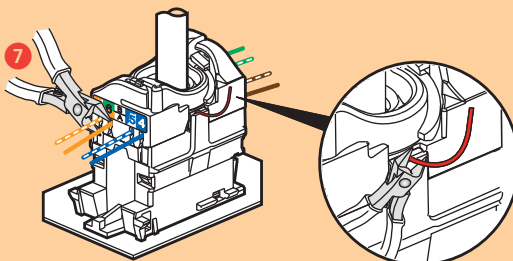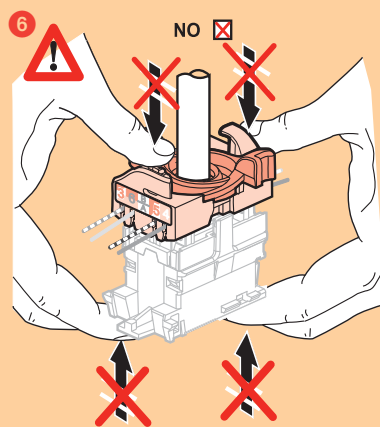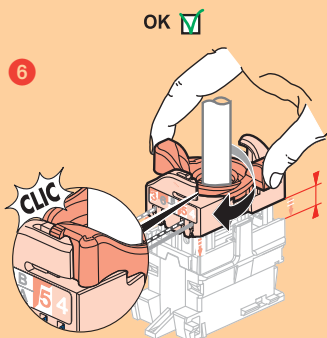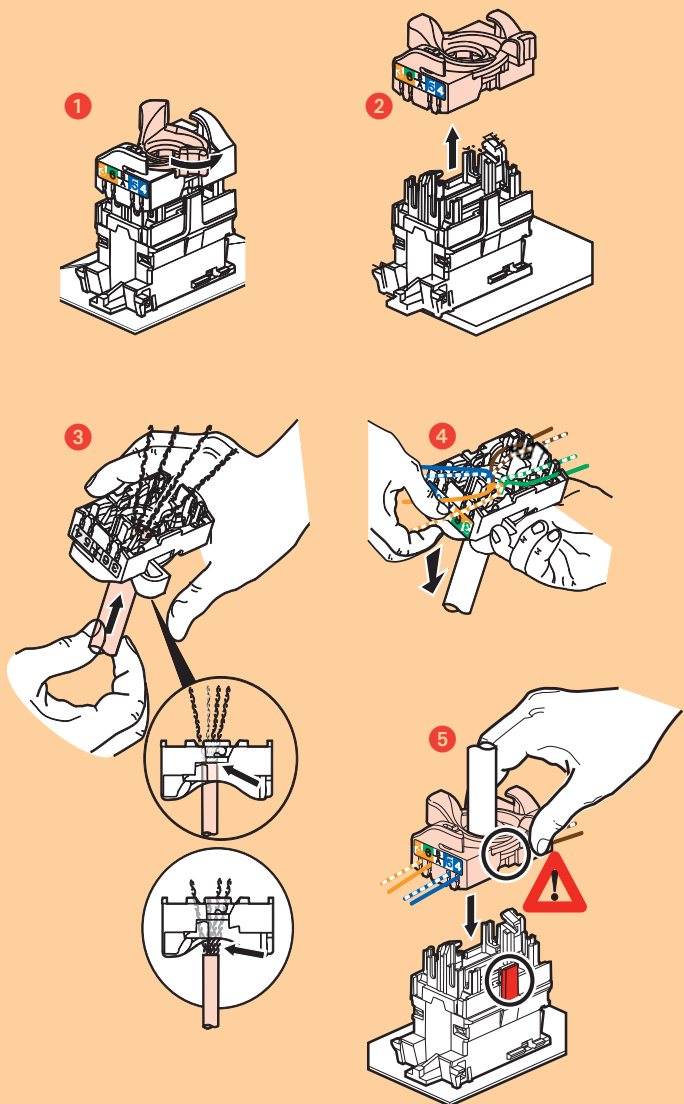

FTP

