

NEW

Myrius™
access control - white
hospitality functions

Myrius™
sockets and connectors - white



6730 37



6730 40



6730 50



6730 51



6730 52



6730 53



6730 56

Technical data (p. 328)

Pack	Cat. nos.	Key fob switch
1/10	6730 37	15 A key fob switch with timedelay 30 sec. supplied without key fob. cat. no. 6730 38
1/10/100	6730 38	Only key fob for switch above

Pack	Cat. nos.	"Do not disturb" indicator and internal control unit
10/100	6730 39	Enables the clients to inform hotel staff of the room status Two settings: • Do not disturb • Clean the room indicator (external unit) to be installed on the corridor, displays the status supply with lamps
10/100	6730 40	"DND control unit" (internal unit) Allows the user to select choose the options supplied with lamps

Pack	Cat. nos.	Shaver socket
1/5/20	6730 49	Accept European, British, American and Australian 2 pin plugs In-built thermal protection, disconnects supply above 20 VA Supplied complete with screw caps with inbuilt IP24 protection transformer enhancing safety. Fits on 4 module Flush box 220/240 V - 50/60 Hz

Technical data (p. 329-334)

Number of modules	Pack	Cat. nos.	TV socket	Number of modules
Monobloc with plate	20/200	6730 50	TV socket	1
	10/100	6730 51	TV / Sat / FM 6 shielded socket 0 - 2400 MHz	2

Number of modules	Pack	Cat. nos.	Data & voice	Number of modules
1+1	20/200	6730 52	RJ-11 Telephone socket with transparent shutter	1
	20/200	6730 53	RJ-11 Double telephone Socket with shutter	1
1+1	20/200	6730 54	UTP Cat 5e information outlets toolless system	1
	20/200	6730 55	UTP Cat 6	1
	10/100	6730 56	UTP Cat 6	2

Number of modules
Monobloc with plate








Myrius™
RJ 11

■ **Technical data**

RJ 11

Cat. no. 6730 52 - 6731 52

Wiring diagram

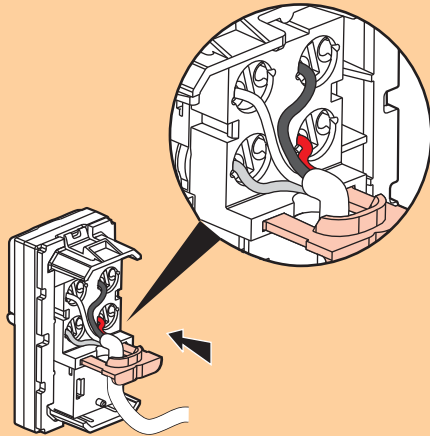



■ **Technical data**

RJ 45


Cat. no. 6730 54 - 6731 54 /
6730 55 - 6731 55, 6730 56-6731 56

UTP	Cat 5e	6730 54 - 6731 54	
	Cat 6	6730 55 - 6731 55	6730 56 - 6731 56

U/UTP



F/UTP



SF/UTP

