

NEW

Myrius™ connectors and controllers - white

Myrius™ protectors and accessories - white



6730 57



6730 58



6730 59



6730 63



6730 31



6730 70



6730 60



6730 61



6730 62

Technical data (p. 330-334)

Technical data (p. 335)

Pack	Cat. nos.	Audio & video connector
1/10	6730 57	3 x female RCA For composite video & stereo, audio connection of a DVD drive, camera, video conference.
10/100	6730 58	3 pole XLR sockets For stereo connection of any peripheral, microphone, mixing console.
1/10	6730 59	Female HD 15 For VGA, XGA or VESA connection of a PC monitor, plasma screen, video projector.

Pack	Cat. nos.	Sound (Volume controller)
1/10/100	6730 63	Suitable for 8 Ohms, 3 Watts (RNS) speaker.

Number of modules	Pack	Cat. nos.	Motor starter	Number of modules
1	1/10/100	6730 30	16 A Motor Starter	2
2	1/10/100	6730 31	25 A Motor Starter	2
2	1/1	6730 78	RCBO Single pole + Neutral - 30 mA, 16 A - 230 VA The RCBO is used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth With test button	Number of modules 2
2	20/200	6730 70	VSP Surge Filter (VSP)-230V~	Number of modules 1
2	20/200	6730 60	Cable Outlet - 8mm	Number of modules 1
2	20/200	6730 61	Blanking Plate	1
2	10/100	6730 62	Blanking Plate	2
1	10/200	0802 90	Panel mounting support	1
2	10/200	0802 91	Panel mounting support	2
2	10/100	0802 99	Din rail mounting support	2

Myrius™ VSP

Myrius™ RCBO


■ Technical data

VSP

Cat. no. 6730 70 - 6731 70


		230 V~
Up		1 kV
Uc	(L/N - L/PE) (N - PE)	250 V~max 230 V~
In (8/20)		2 kA
Icc max.		2,5 kA
I _L		10A
I max (8/20).		4 kA

Installation Method

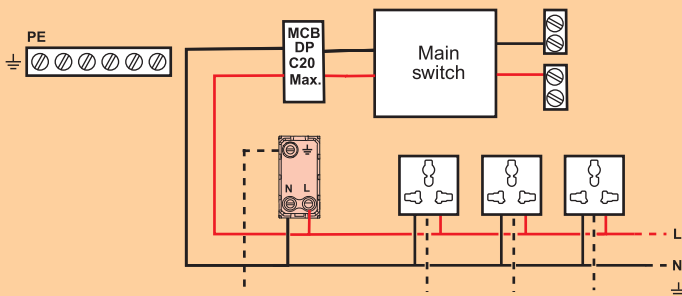

Make sure the power supply is disconnected before any intervention. Strictly comply with instructions for installation and use.

Operation



Green indicator lamp
Operational protection

Recommendation

Regularly check that the green LED is on.
-When LED is off, change the product

Safety Instructions

GB IE

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

■ Technical data

RCBO

Cat. no. 6730 78

