


LED ROADWAY LUMINAIRE "EDGE-PLUS"

BRLEP 25W LED WH



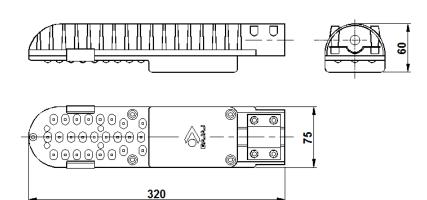

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Side roads,
- Residential complexes,
- Small traffic round-abouts,
- Parks and gardens,
- Security lighting, etc.

Specification

- Epoxy powder coated pressure die-cast aluminium housing with weatherproof gasket for lamp and control gear accessories.
- Clear polycarbonate front cover fixed with SS screws.
- LED specification High power LED chip with color temperature 5700K ±300K
- LED make CREE LED
- Luminaire is wired with inbuilt driver with open/short circuit and surge protection (≥10kV)
- Input voltage range: 100-300 V AC.
- Side entry mounting for 25-33 mm OD pipe bracket.
- Degree of protection: IP65

Flectrical Data

Product Code	Cat. Ref.	Input Voltage	System Current	System Wattage	Power Factor	
		(V) AC	(Amp.) AC	(W) AC		
169826	BRLEP 25W LED WH	240	0.110	25	> 0.95	

Data subject to variation due to change/improvement in the design, materials and processes.

