
LED ROADWAY LUMINAIRE "CUB PLUS"

BCLST 30W LED I

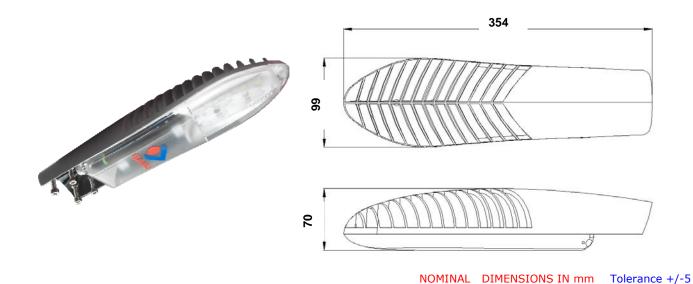

Application

- · Side roads,
- Residential complexes,
- Small traffic round-abouts,
- Parks and gardens,
- Security lighting, etc.

Specification

- Epoxy powder coated high pressure die-cast aluminium housing with weatherproof gasket for lamp and control gear accessories.
- Clear polycarbonate front cover fixed with SS screws.
- LED specification Make: CREE/OSRAM; Color temp.: 5700K
- Luminaire is wired with inbuilt driver with 5kV surge protection.
- Input voltage range: 140-310V AC.
- Side entry mounting for 38mm OD pipe bracket.
- Degree of protection: IP65

Electrical Data

Code Voltage Wattage Current Factor (V) AC (W) AC (Amp.) AC								
		Cat. Ref.	Voltage	Wattage	Current	Power Factor		
1 109007 DCL31 30W LLD L 740 30 0.131 7 0.9.	169887	BCLST 30W LED I	240	30	0.131	≥ 0.95		

Data subject to variation due to change/improvement in the design, materials and processes.

	12-12-2016	FOR -					
BAJAJ LUMINAIRES	CHECKED	SD		REV - 0	DATE-19-12-2016		
Making the difference	APPROVED	DVRS		DRG. No			
Making the difference	DATA SHEET RELEASED ON DT-		BCLST 30W LED I - 001				
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. * E-mail: luminaires@bajajelectricals.cc							