



Green Perform Sleek

DN295B LED10S-6500 PSU WH

Green Perform Sleek luminaire is designed for low dept false ceiling. Slim design with non-integral driver enables installation into low height false ceilings of different thickness and materials. Narrow rim semi-deep recessed design gives high quality lighting for designer ceilings. Highly efficient Electronic driver with high performance LED's ensures the longer life & high performance in this product category. Wide range of CCT's & Lumen packs suitable for various application.

Product data

| General Information | |
|-----------------------------|--|
| Beam angle of light source | 120 ° |
| Light source color | 865 cool daylight |
| Driver included | Yes |
| Optic type | 120 [Beam angle 120°] |
| Optical cover/lens type | Polycarbonate |
| Luminaire light beam spread | 120° |
| Protection class IEC | Safety class I (I) |
| Flammability mark | F [For mounting on normally flammable surfaces] |
| Warranty period | 2 years |
| Material | Aluminum |
| Light source engine type | LED |
| Operating and Electrical | |
| Input Voltage | 130-320 V |
| Input Frequency | 50 Hz |
| Power Factor (Min) | 0.95 |

| Controls and Dimming | |
|-----------------------------|---------------------------------|
| Dimmable | No |
| Mechanical and Housing | |
| Housing Material | Aluminum die-cast |
| Optic material | Polycarbonate |
| Optical cover/lens material | Polycarbonate |
| Mounting device | Spring clip for recess mounting |
| Color | White and black |


| Approval and Application | |
|--|-------------------------------------|
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |
| Surge Protection (Common/Differential) | Surge protection level until 2.5 kV |

| Initial Performance (IEC Compliant) | |
|-------------------------------------|----------|
| Initial luminous flux (system flux) | 1000 lm |
| Initial LED luminaire efficacy | 110 lm/W |
| Init. Corr. Color Temperature | 6500 K |
| Init. Color Rendering Index | >80 |
| Initial chromaticity | <5 |

GreenPerform Sleek

| | |
|--|---------------------------|
| Initial input power | 9 W |
| Power consumption tolerance | +/-10% |
| Over Time Performance (IEC Compliant) | |
| Median useful life L70B50 | 50000 h |
| Application Conditions | |
| Ambient temperature range | 0 to +45 °C |
| Product Data | |
| Order product name | DN295B LED10S-6500 PSU WH |


| | |
|---------------------------------|--------------|
| Order code | 919515812853 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 20 |
| Material Nr. (12NC) | 919515812853 |
| Net Weight (Piece) | 0.230 kg |



Warnings and Safety

Dimensional drawing

Product: GreenPerform Sleek
Type: DN295/DN296
Application: Indoor Industrial

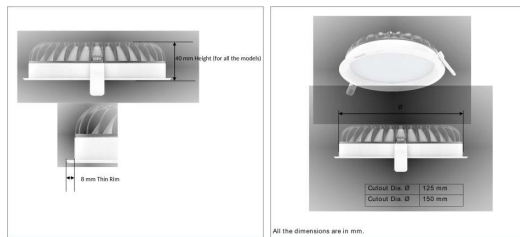

Indoor Luminaires

