


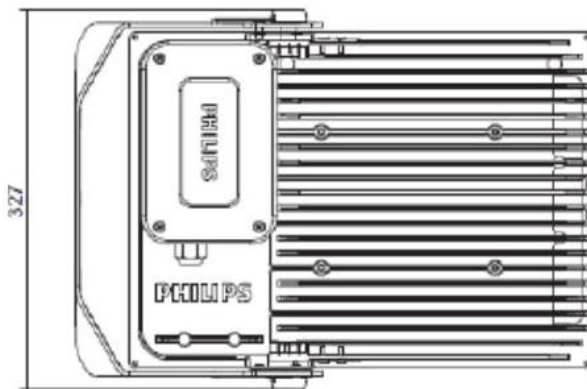


Tempo LED Floodlight

Specification	Luminaire Details
Lumen output (fixture level)	17200 to 24200 Lumens at system level
Light Source	LED Module
System Efficacy	>95 lumens/watt
Power consumption	170 W to 240 W
Voltage Range	120 - 277 V AC
Lifetime	50,000 hours @ L70
Bottom Cover	High efficiency glass.
Ingress Protection	IP65
Beam	Symmetric narrow beam and graduation disk for aiming.
Weight	11 - 13 Kg Approx.
Material	LM6 Pressure die-casting aluminum housing.
Light Color	Cool White, 5700 degree Kelvin
Driver Efficiency	>90%
Surge Protection	>3 KV
Power Factor	>0.95
Mounting Details	Provided with adjustable mounting bracket.

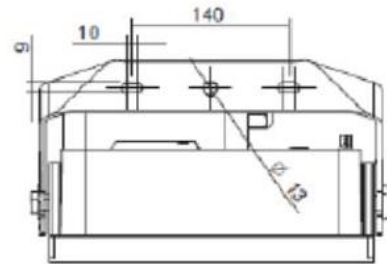

Catalogue No.	Lumen Package	Bottom Cover	Wattage
BVP410 LED 172 CW HE NB FG S3 XT	17200 Lumens	High Efficiency Glass	170 W
BVP410 LED 210 CW HE NB FG S3 XT	21000 Lumens	High Efficiency Glass	210 W
BVP410 LED 242 CW HE NB FG S3 XT	24200 Lumens	High Efficiency Glass	240 W

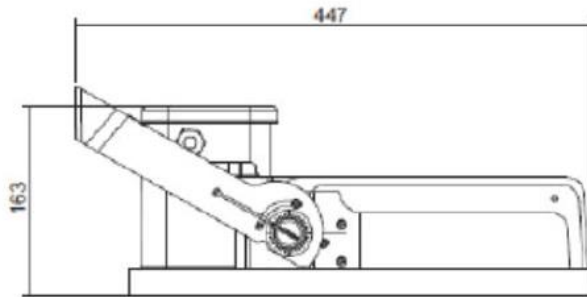

pictogram
distance_from_wall

CAUTION:
MOUNTING TO BE DONE USING BOLT M12

