

TCS 150

Office
Application

Page 07



Product description

Surface / suspended mounted mirror optics suitable for TL-5 28 Watt and TL-5 HO 54 Watt. Single and twin lamps version are available.

TCS 150 is a visually appealing, sleek, efficient surface / suspended mounting luminaire with high light output level and uses environment friendly high efficiency TL5 lamps. The luminaire helps in creating a vivacious ambience which can energize people and help them in delivering great results.

Features

- 45% energy saving vs. 40W TL lamp.
- Ultra slim, BatWing profile for maximum light output.
- Instant start, flicker-free, electronic operation.


Applications

- Home
- Hotels
- Colleges
- Schools
- Guest houses
- Officer interiors
- General ambient lighting, furniture and under-cabinet, mirror sides, corridors.

Installation

Design for surface mounting, this luminaire can be fixed on wall or ceiling by means of installer provided along with the luminaire.

IP 20

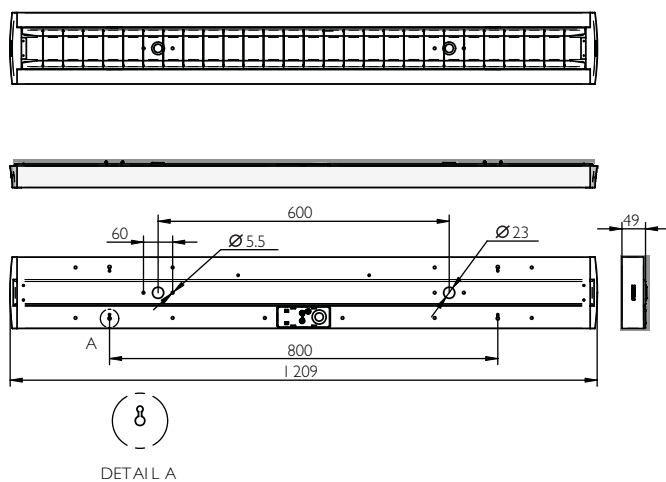

Technical Drawing

Technical data

Type	For lamp	Nominal voltage (V)	Recommended ballast	Main current (A)	Nominal power factor
TCSI50 2xTL-5 28W MIEBT 228	2 x TL-5 28W	240	1 x EBT 228 TL5	0.27	0.98
TCSI50 1xTL-5 28W MIEBT 128	2 x TL-5 28W	240	1 x EBT 128 TL5	0.14	0.98
TCSI50 2xTL-5 28W MIEBT 254	2 x TL-5 54W	240	1 x EBT 254 TL5	0.5	0.99
TCSI50 1xTL-5 28W MIEBT 154	2 x TL-5 54W	240	1 x EBT 154 TL5	0.25	0.99

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TCS 150 2xTL-5 28W MI EBT 228	9190 158 10430	2	125 x 17 x 14	2.8	6.5	0.029
TCS 150 1xTL-5 28W MI EBT 228	9190 158 10452	2	125 x 17 x 14	2.8	6.5	0.029
TCS 150 2xTL-5 54W MI EBT 254	9190 158 10453	2	125 x 17 x 14	2.8	6.5	0.029
TCS 150 1xTL-5 54W MI EBT 154	9190 158 10454	2	125 x 17 x 14	2.8	6.5	0.029

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.