



STAND-ALONE INSTALLATION SUPPORT FOR
3RU21/3RB30/3RB31/3RR2 SZ S00, STAND-ALONE
INSTALLATION MAIN CIRCUIT: SCREW TERMINAL
AUX. CIRCUIT: --

General technical data:

product brand name		SIRIUS
Product designation		individual mount
Size of overload relay		S00
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	89
Depth	mm	75






Connections/ Terminals:

• — Type of connectable conductor cross-sections for main contacts finely stranded — with core end processing		0.5 ... 2.5 mm ²
---	--	-----------------------------

- Type of connectable conductor cross-sections at AWG conductors
 - for main contacts


1x (20 ... 12)

Certificates/ approvals:

General Product Approval		Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 UL		 EG-Konf.	 ABS
			Typprüfbescheinigung/Werkszeugnis	

Shipping Approval



Shipping Approval	other
 RMRS	Umweltbestätigung Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2916-3AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2916-3AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2916-3AA01&lang=en

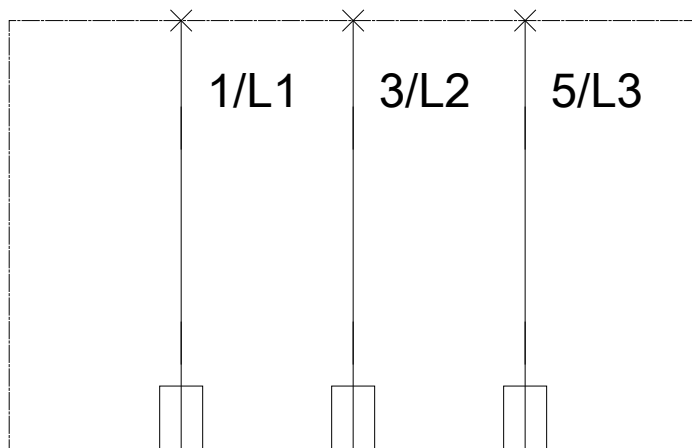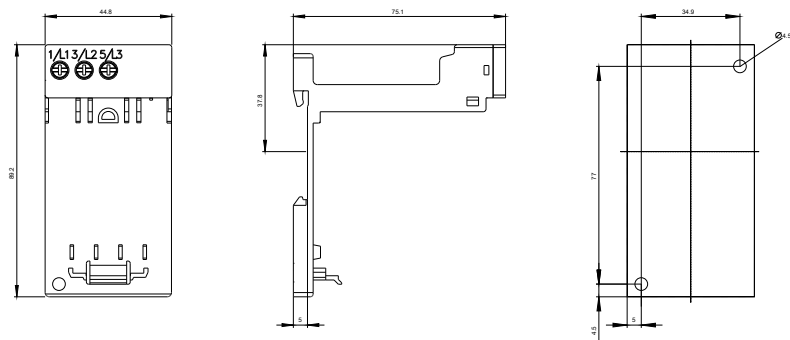

last modified:

12/18/2016