SIEMENS

Data sheet 3VM9908-0BL33

shunt trip left 208-277V AC 50/60Hz 220-250V DC accessory for: $3\mbox{VM}$ to $630\mbox{A}$



Model		
Product brand name	SENTRON	
Product designation	Accessories	
Product version	Auxiliary release	
Accessories	Auxiliary release	
General technical data		
Degree of pollution	3	
Overvoltage category	III	
Apparent power consumption / maximum	40 V·A	
Consumed active power / at DC / maximum	35 W	
Voltage		
Rated insulation voltage Ui	690 V	
Surge voltage resistance	4 kV	
Mechanical Design		
Height	65.1 mm	
Width	25.7 mm	
Number of slots	3	
Depth	31.2 mm	

Net weight	91 g
Tightening torque / with screw-type terminals / minimum	0.4 N·m
Tightening torque / with screw-type terminals / maximum	0.5 N·m

Connections according IEC	
Wire stripping length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16

Connetctions according UL	
Wire stripping length [in]	0.4 in
Tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
Tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in

Certificates

General Product Approval

Declaration of Test Certific-Shipping Approval ates

Miscellaneous





Miscellaneous



LRS

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9908-0BL33

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VM9908-0BL33


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9908-0BL33


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

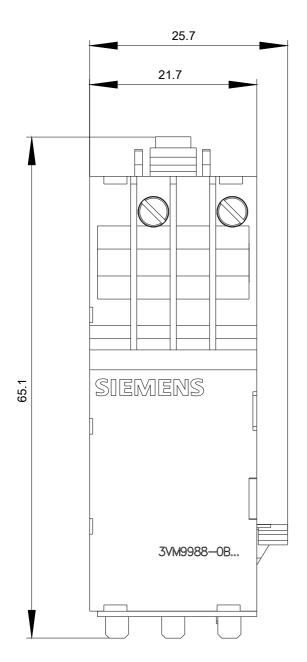

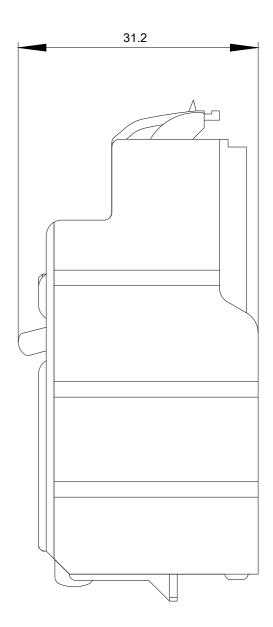

last modified: 04/06/2020