




"GREEN LED"
"BATON"
BCLSB 20 WH

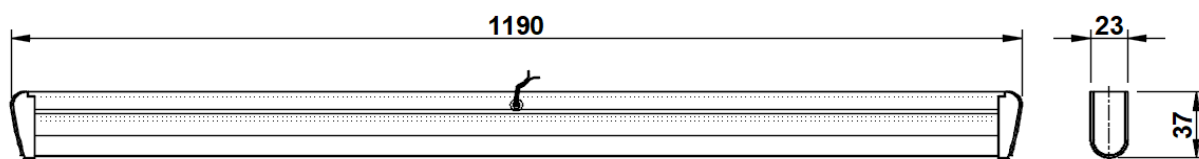

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices, Shopping malls,
- Reception areas, Hospitality industry.

Specification

- Polycarbonate co-extrusion tube for LED light housing with engg-plastic end caps.
- Co-extrusion tube top part is made of white polycarbonate material, and the bottom is made of opal diffused polycarbonate material with groove inside for PCB.
- LED populated on PCB comprising of LED's connected in series parallel.
- LED CCT: White (WH): 6000K \pm 500K
- Driver: constant current output driver, operating range 140–270V AC supply voltages.
- Ingress protection: IP20

Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor
112798	BCLSB 20 WH	20W	240	95	> 0.9

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	31-03-2017	FOR –
	CHECKED	AS		REV - 1 DATE-23-06-2017
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BCLSB 20 WH - 001
BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : luminaires@bajajelectricals.com