



MASTER TL5 High Efficiency Eco

MASTER TL5 HE Eco 25=28W/830 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HE Eco lamp offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Product data

General Information	
Cap-Base	G5 [G5]
Life to 50% Failures Preheat (Nom)	25000 h
Features	na [Not Applicable]
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	99 %
LSF Preheat 20000 h Rated	94 %
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux (Nom)	2900 lm
Luminous Flux (Rated) (Nom)	2600 lm
Color Designation	Warm White (WW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	114 lm/W
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	103 lm/W
Color Rendering Index (Max)	85
Color Rendering Index (Min)	
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	
Color Rendering Index (Nom)	82
LLMF	
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Nom)	25.2 W
Lamp Current (Nom)	0.170 A
Temperature	
Design Temperature (Nom)	35 °C
Controls and Dimming	
Dimmable	Yes

MASTER TL5 High Efficiency Eco

Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	28 kWh


Product Data

Full product code	872790082588600
Order product name	MASTER TL5 HE Eco 25=28W/830 UNP/40

EAN/UPC - Product	8711500880000
Order code	927990983031
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927990983031
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-25/30/1B-L/P-G5-16/1150

Warnings and Safety

Dimensional drawing





Product

MASTER TL5 HE Eco 25=28W/830 UNP/40

TL5 HE Eco 25=28W/830


Photometric data

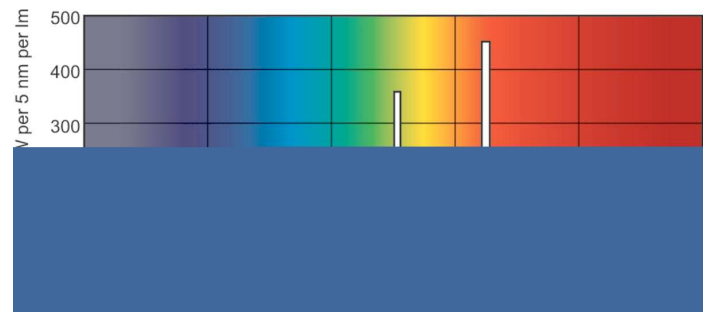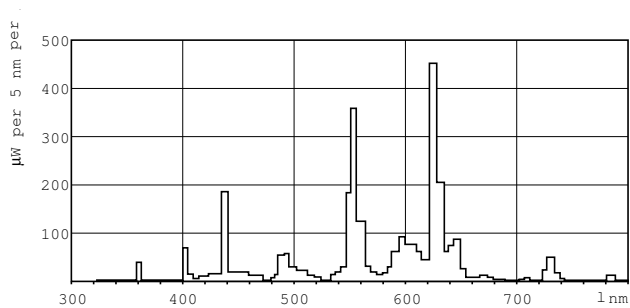

LDPB_TL5HEECO_830-Spectral power distribution B/W

MASTER TL5 High Efficiency Eco

Lifetime

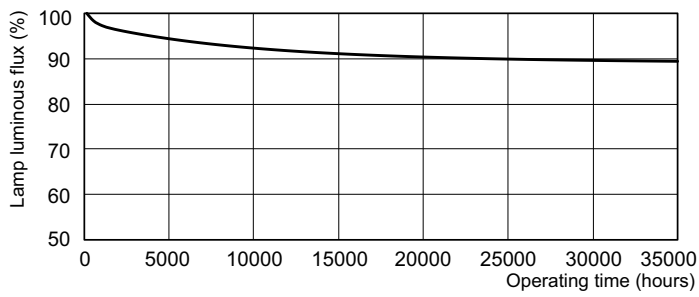

LDLM_TL5HEECO_0001-Lumen maintenance diagram

