


LED ROADWAY LUMINAIRE "EDGE-PLUS"

BRLEP 30W LED WH



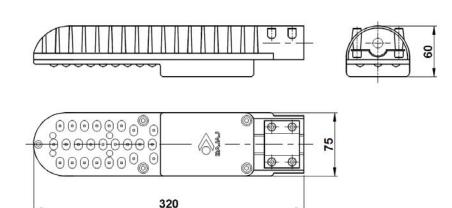

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Side roads,
- Residential complexes,
- Small traffic round-abouts,
- Parks and gardens,
- Security lighting, etc.

Specification

- Epoxy powder coated pressure die-cast aluminium housing with weatherproof gasket for lamp and control gear accessories.
- Clear polycarbonate front cover fixed with SS screws.
- LED specification High power LED chip with color temperature 5700K
- LED make CREE LED
- Luminaire is wired with inbuilt driver with open/short circuit and surge protection.
- Input voltage range: 100-300 V AC.
- Side entry mounting for 25-33 mm OD pipe bracket.
- Degree of protection: IP65

Flectrical Data

Electrical Bata											
	Product	Cat. Ref.	Input	System	System	Power					
	Code		Voltage	Wattage	Current	Factor					
			(V) AC	(W) AC	(Amp.) AC						
	169907	BRLEP 30W LED WH	240	30	0.131	> 0.95					

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	23-01-2017	FOR –				
BAJAJ LUMINAIRES Making the difference	CHECKED	AS		REV - 0	DATE-25-02-2017			
	APPROVED	DVRS		DRG. No				
	DATA SHEET RELEASED ON DT-			BRLEP 30W LED WH - 01				
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. * E-mail: juminaires@bajajelectricals.com								