

DLP U-PVC mini trunking systems


for cable distribution

■ Selection chart for DLP mini trunking

		Length	Finishing accessories				Junction elements
WHITE		2 m	End cap	Internal angle	External angle	Flat angle	Flat junction
32 x 12.5		0300 15	0312 03	0302 51	0302 51	0302 53	0302 54
32 x 16		0308 04	0312 07	0333 25	0333 25	0333 27	0333 30
32 x 20		0300 17	0312 09	0302 71	0302 71	0302 73	0302 74


■ Carrying capacity

Cat.Nos without partition	Maximum X-section in mm ²	Number of conductors				Cable Ø max. in mm
		1.5 mm ²	2.5 mm ²	4 mm ²	6 mm ²	
0300 15 32 x 12.5 mm	285	19	12	10	4	2 x 10
0308 04 32 x 16 mm	330	25	16	15	7	13
0300 17 32 x 20 mm	500	34	22	19	11	18

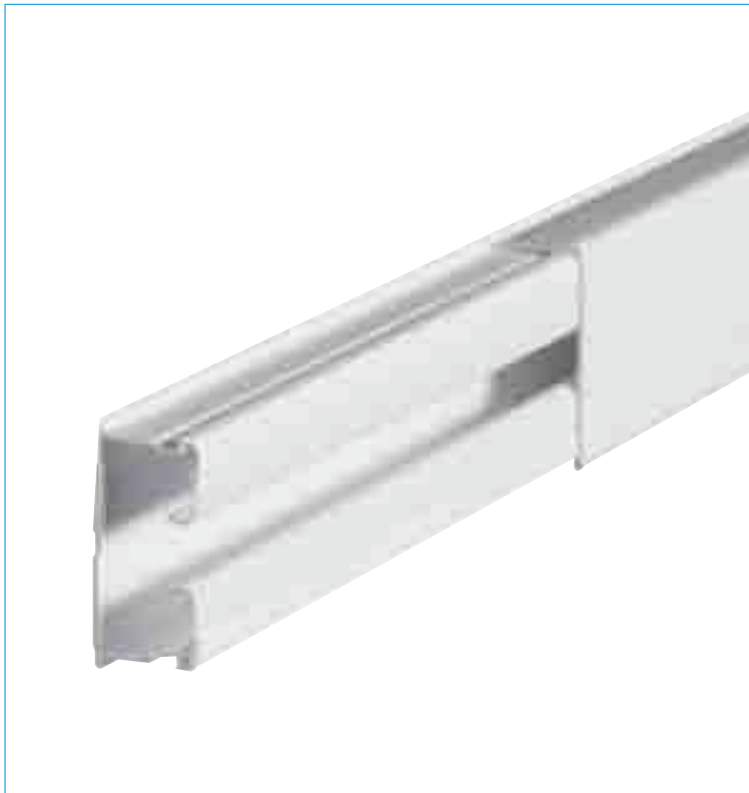

Cable-grip

It makes the installation easier and faster by containing all the wires inside the trunking body before the cover is clipped



Comfortable implementation


■ During installation, the conductors stay in place in the 1 compartment mini-trunking thanks to cable-grip membranes



Speed of installation

■ Cable holding is integrated with the trunking (no staple to add)
 ■ Easy conductors position
 ■ Quick cover fitting


DLP U-PVC trunking system 32 x 12.5, 32 x 16 and 32 x 20 mini-trunking system

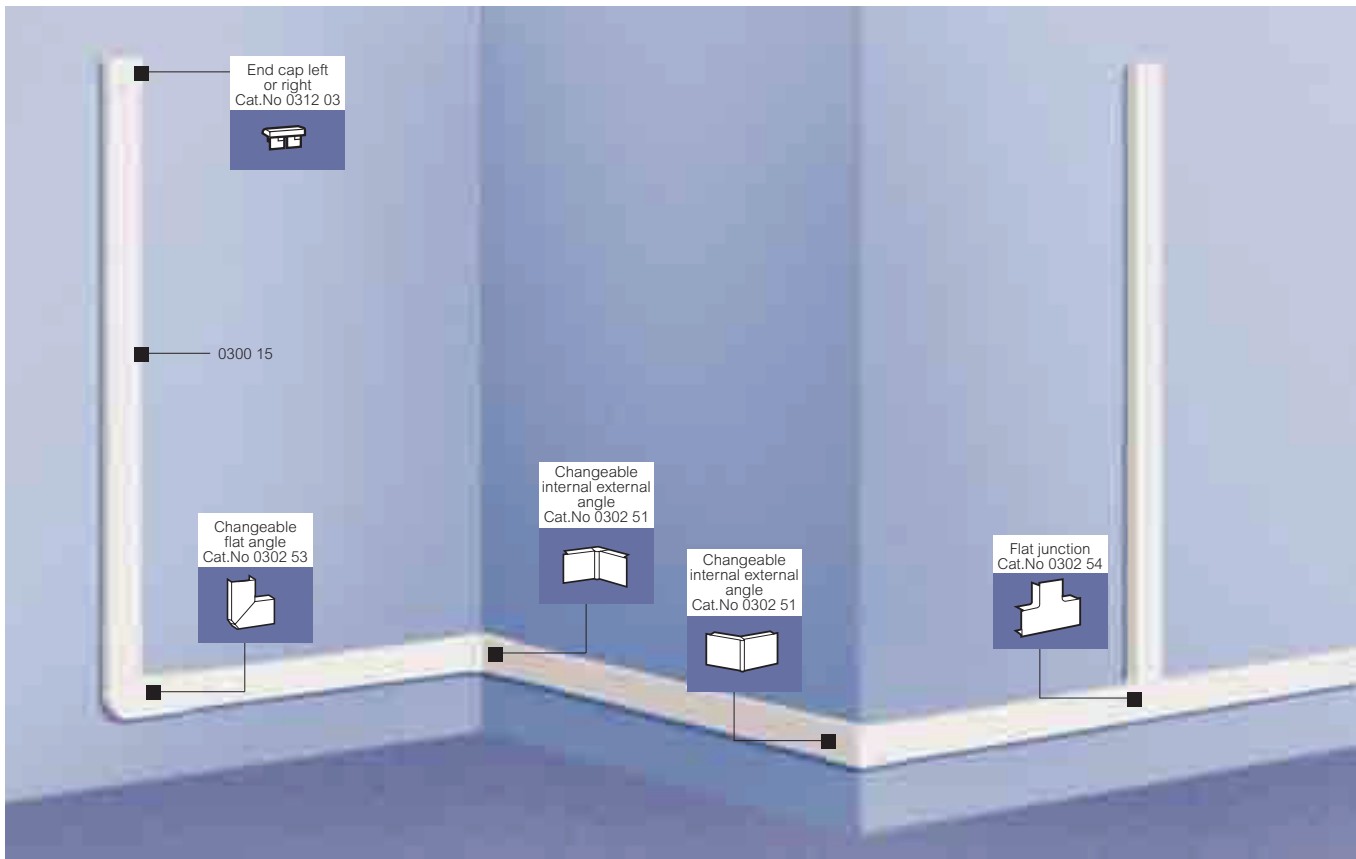

Wiring capacity chart (p. 458)
Selection chart (p. 460-462)


White RAL 9010
Factory finish
Uniform grip and thickness throughout the length
System with independent cover
Conforms to NF C 68-104

Pack	Cat.Nos	Mini-trunking - 32 x 12.5 mm
80 ⁽¹⁾	0300 15	Without central partition Length 2 m




Pack	Cat.Nos	Finishing accessories
20/400	0312 03	End cap right or left
10/100	0302 51	Changeable internal-external angle from 60° to 120°
10/100	0302 53	Changeable flat angle from 85° to 95°
10/200	0302 54	Flat junction

Pack	Cat.Nos	Mini-trunking - 32 x 16 mm
60 ⁽¹⁾	0308 04	Without central partition Length 2 m



Pack	Cat.Nos	Finishing accessories
10/500	0312 07	End cap right or left
10/100	0333 25	Changeable internal-external angle from 60° to 120°
10/100	0333 27	Changeable flat angle from 85° to 95°
10/200	0333 30	Flat junction

Pack	Cat.Nos	Mini-trunking - 32 x 20 mm
50 ⁽¹⁾	0300 17	Without partition Length 2 m



Pack	Cat.Nos	Finishing accessories
10/200	0312 09	End cap right or left
10/100	0302 71	Changeable internal-external angle from 60° to 120°
10/100	0302 73	Changeable flat angle from 85° to 95°
10/100	0302 74	Flat junction

⁽¹⁾Number of meters per pack

⁽¹⁾Number of meters per pack