Troffer-RC 370 G4 Launch


Sisesh Behuray & Nitin Bahl

Date: 30/01/2018





Troffer – High on Specification & Efficacy

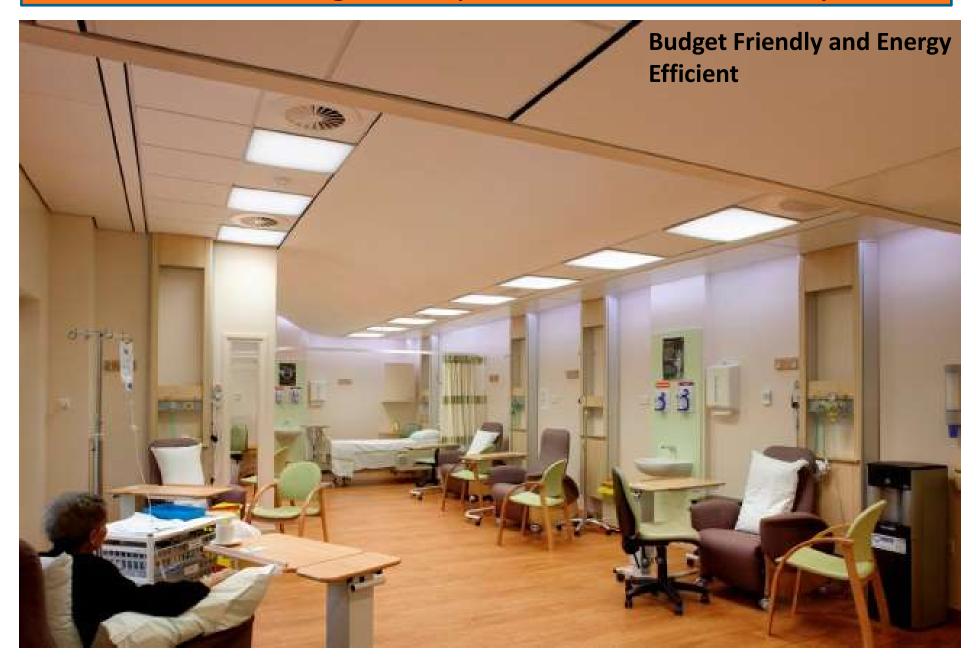

Troffer:

Long Life, Affordable, reliable and energy efficient



Troffer – The Surface of Light



Features and Benefits

- Energy Efficient High Efficacy of ≥ 125 Lm /W
- Comfortable Light CRI of 80 to ensure better color rendering
- Lifetime: 25,000 Hrs., Reliable performance
- Optimal Lighting Effects: New light platform and optical design for glare free environment



Spec Sheet

S No.	Description	RC370B G4		
1	System Lumen	3000 Lm @ 24W		
2	ССТ	6500K / 4000K		
3	CRI	80		
4	SDCM	<5		
5	Efficacy	LED 30S : 125 Lm/W		
6	Operating Temp	Ambient : 45 Degrees		
7	IP rating/IK	20/ 02		
8	Diffuser	PS		
9	Dimensions	595×595x 70 mm		
10	Life	L70B50@ 25K Hrs.		
11	Serviceability	Class B		
12	LED	APT		
13	Housing	CRCA		
14	Look and Feel	Fully Diffused Luminaire		
15	THD	<33%		



Focus on general illumination applications

- Office
- Retail
- Healthcare
- Hospitality
- Showrooms












How to read the Cat ref



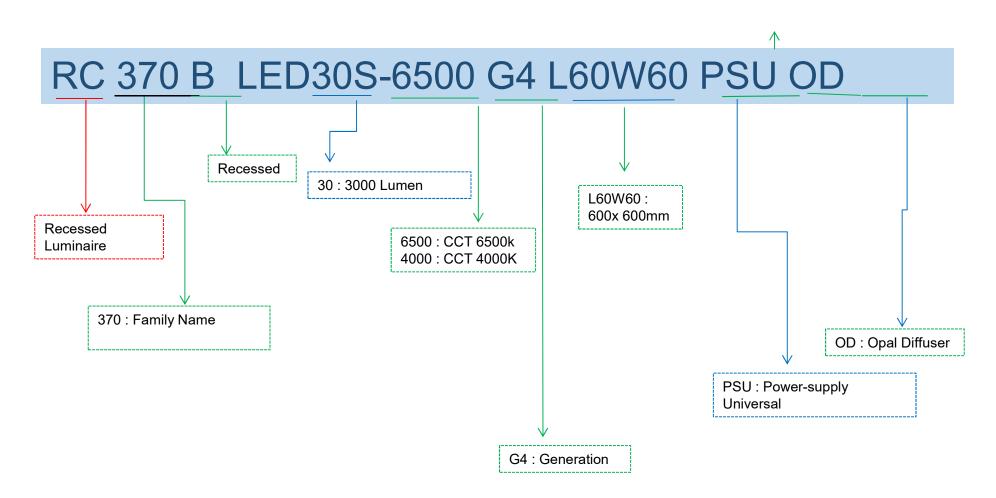


Ordering Codes:


S No.	12 NC	Description	Qty Per Box	Spare Driver 12 NC
1	919515812137	RC370B LED30S -6500 G4 L60 W60 PSU OD	2	441539003861
2	919515812153	RC370B LED30S -4000 G4 L60 W60 PSU OD	2	441539003861



Only for any servicing work Diffuser frame can be opened (but not recommended)

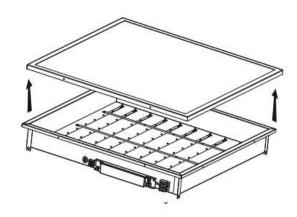

Remove 4 nos. screws from Diffuser Frame to open the Fitting for access.



Unscrew to open Diffuser Frame



Troffer Recessed











THIS LUMINAIRE MUST BE EARTHED

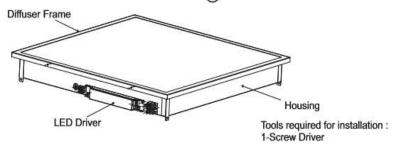

Product Dimensions



ATTENTION: Install in accordance with national and local building and electrical codes.

MI Sheet

