

No. of Phases		3	Reference	Performance	IS:12615
Frame Designation		112M FLP	Standard	Enclosure	IS:60079-1
Rated Output	kW	3.70	Protection IS:4691		IP 55
	HP	5.00	Vibration Standard		IS:12075
No. of Poles		4	Noise Standard		IS:12065
Rated Voltage		V	Duty		S1
Rated Frequency		Hz	Insulation Class		F
Rated Current		A	Cooling IS:6362		IC411
Rated Speed		rpm	Terminal Box Details	Terminal Size	M5
Rated Torque		kgm		No. of Terminal	6
Efficiency	Full load	%	86.3	Max. cable size	mm ² 2x3Cx10.0
	3/4 load	%	86.3	DE	6306ZZ
	1/2 load	%	85.0	NDE	6206ZZ
Power factor	Full load		0.84	Lubrication	Prelubricated
	3/4 load		0.80	Life L10 (Direct coupled)	hrs. 50,000
	1/2 load		0.68	Regreasing Time	hrs. -
Temp. Rise (Res.)		°C	70	Lifting Eyebolt IS:4190	M8
Acceleration Time		sec.	-	Motor Weight (approx)	kg 68
Stator Connection			D	Rotor GD ²	kgm ² 0.0404
Tropicalised? (Yes/No)			Yes	Ambient Temp.	°C 50
I _{st} / I _r		%	7.0	Overall Dimensions of Packed motor (LxBxH) (mm)	
T _{st} / T _r		%	2.4		
T _{po} / T _r		%	2.8	Voltage Variation ±	% 10
Locked rotor withstand time	Hot	sec	6	Frequency Variation ±	% 5
	Cold	sec	13	Combiend Variation ±	% 10

Remarks: (1) Efficiency Class : IE2
(2) Motor construction: TEFC

Data subject to tolerance as per IS:12615.


Prep.: Engg

Chkd.:

Date:

Date:

TORQUE SPEED CURVE

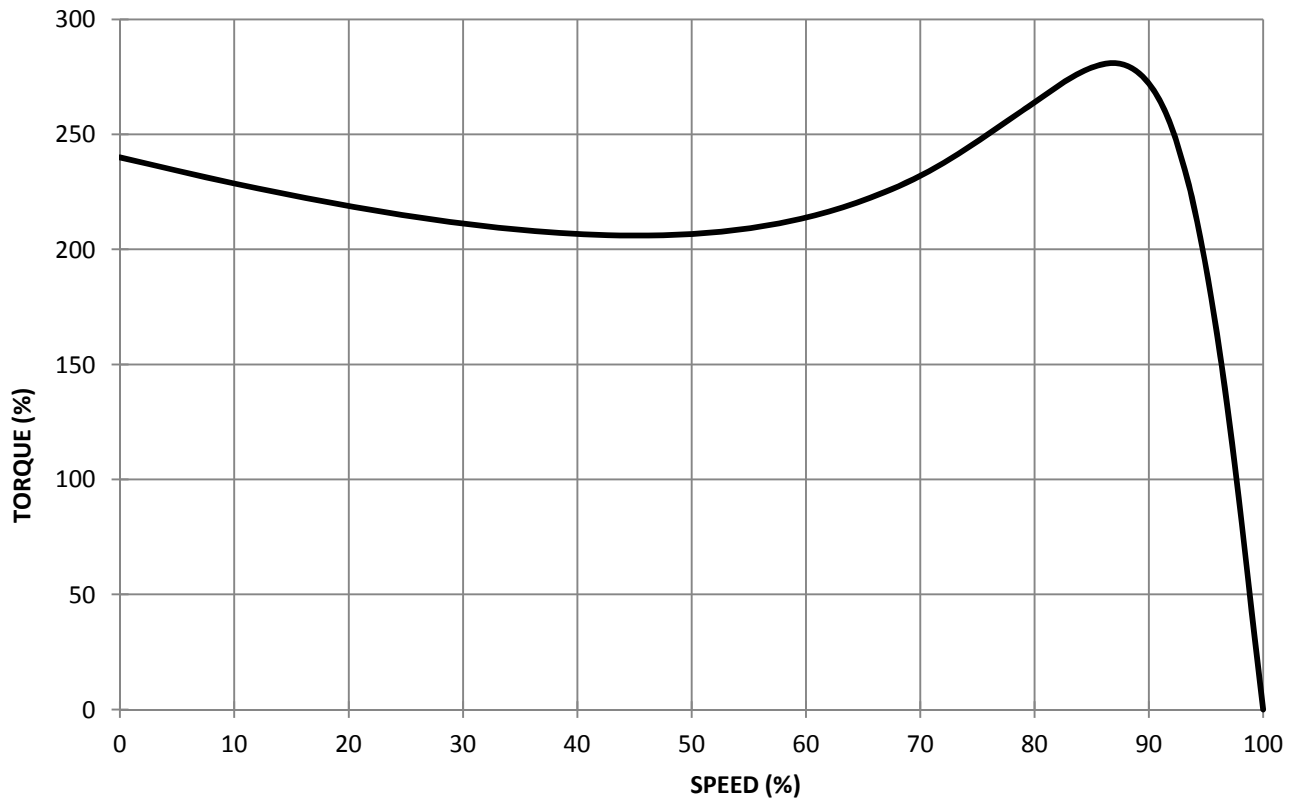

LOAD-EFFICIENCY-POWER FACTOR CURVE

